




PSC 20/40

TYPICAL VALUES TABLE			
USA STD SIEVE SIZE	PERCENT RETAINED		PERCENT PASSING
	MESH	INDIVIDUAL	CUMULATIVE
20	0.5	0.5	99.5
30	13.7	14.2	85.8
35	35.6	49.8	50.2
40	42.9	92.7	7.3
45	6.9	99.6	0.4
50	0.3	99.9	0.1
PAN	0.0	99.9	0.1

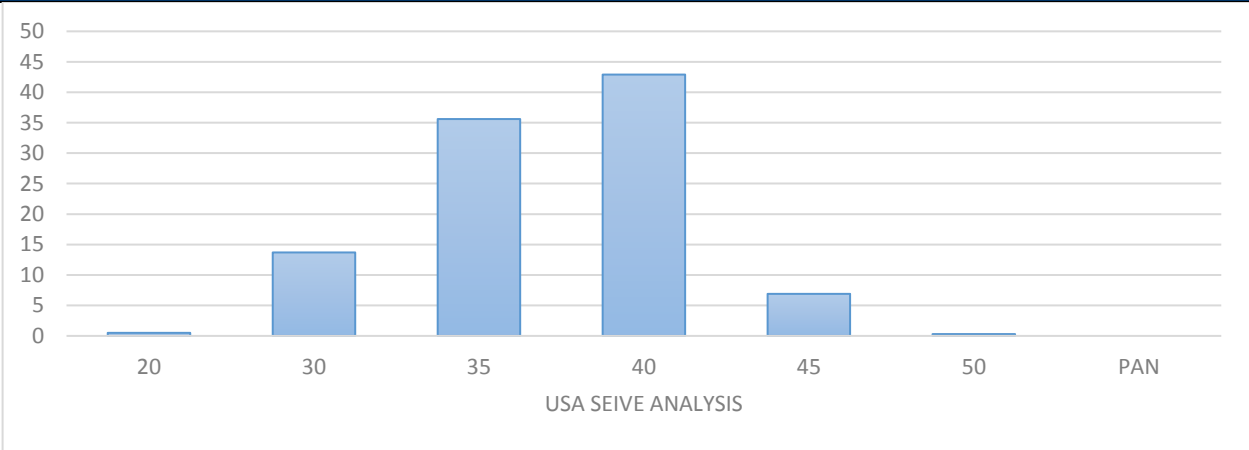

Typical Physical Properties

Loss on Ignition0.05%	Specific Gravity2
Moisture<0.10%	Clay Content0.08%
Base pH6.8-7.2	Acid Demand Value<1.00 at pH 7.0
Sintering Point3010° F	Bulk Density	94-98 lb/ft ³ untapped
Grain ShapeRounded		

Typical Chemical Analysis

SiO ₂ (Silicon Dioxide)99.50	CaO (Calcium Oxide)0.04
Al ₂ O ₃ (Aluminum Oxide)0.07	Na ₂ O (Sodium Oxide)0.01
K ₂ O (Potassium Oxide)0.03	MgO (Magnesium Oxide)0.01
Fe ₂ O ₃ (Iron Oxide)0.03	TiO ₂ (Titanium Dioxide)0.01

DISCLAIMER: The sizing of this Product Data sheet is an average of samples tested from 12/6/08 to 1/19/09 date. The other testing has been done in varying frequency and should be discussed before relying on it to make final decisions. Pattison Sand Company makes no warranty expressed or implied, by this product data sheet.

WARNING: This material contains crystalline silica, which can cause silicosis and lung cancer. See our SDS for additional information.