




PSC 60-140R

TYPICAL VALUES TABLE				
USA STD SIEVE SIZE		% RETAINED		%PASSING
MESH	MILLIMETERS	INDIVIDUAL	CUMLATIVE	CUMULATIVE
70		3.3	3.3	96.7
100		58.6	61.9	38.1
120		23.6	85.5	14.5
140		8.1	93.6	6.4
200		5.7	99.3	0.7
PAN		0.7	100.0	0.0

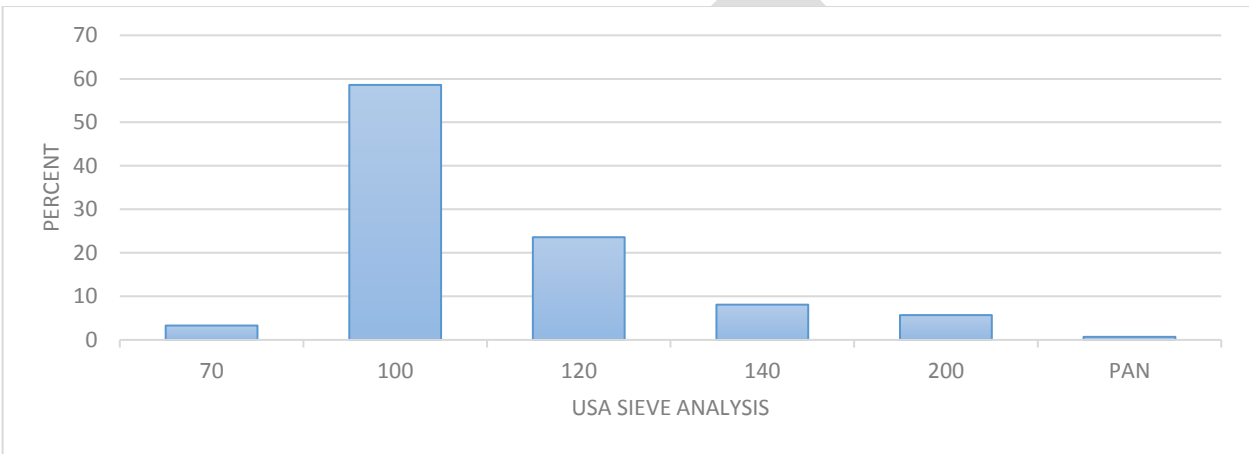

Typical Physical Properties

Loss on Ignition0.05%	Specific Gravity2.65
Moisture5-8%	Clay Content0.08%
Base PH6.8-7.2%	Acid Demand Value<1.00 at pH 7.0
Sintering Point3010 °F	Bulk Density	94-98 lb/ft ³ untapped
Grain ShapeRounded		

Typical Chemical Analysis

SiO ₂ (Silicon Dioxide)99.50	CaO (Calcium Oxide)0.04
Al ₂ O ₃ (Aluminum Oxide)0.07	Na ₂ O (Sodium Oxide)0.01
K ₂ O (Potassium Oxide)0.03	MgO (Magnesium Oxide)0.01
Fe ₂ O ₃ (Iron Oxide)0.03	TiO ₂ (Titanium Dioxide)0.01

DISCLAIMER: The sizing of this Product Data sheet is an average of samples tested from 2/1/2011 to 2/8/2011. The other testing has been done in varying frequency and should be discussed before relying on it to make final decisions. Pattison Sand Company makes no warranty expressed or implied, by this product data sheet.

WARNING: This material contains crystalline silica, which can cause silicosis and lung cancer. See our SDS for additional information.